

Laserliner

LaserRange-Master Gi3



Laser distance meter – with green DLD laser technology

- **Green laser technology**
- **DLD technology** creates an extremely bright, green laser point.
- **Point-precise measuring with laser** to determine lengths exactly
- **The area and volume functions** permit the acquisition of room sizes, for example to calculate material quantities
- **Measuring accuracy** up to 30 m: $\pm 2 \text{ mm}^{**}$
- **Inside measurement range: 0,3 m to 30 m**
- **2 selectable measurement reference points:** front and rear
- **Min/Max function** to determine diagonals, verticals and horizontals
- **Illuminated 2-line VTN display**
- **Small, compact design** – fits in any toolbox
- **Sturdy, ergonomically designed, rubberised casing**

TECHNICAL DATA

ACCURACY $\pm 2 \text{ mm}$ (typical)**
MEASUREMENT RANGE max. 30 m***
MINIMAL RANGE 0,3 m
LASER Class 2 < 1mW
LASER WAVELENGTH 515 nm
OPERATING CONDITIONS -10°C...40°C, max. humidity 20...85% rH, no condensation, max. working altitude 2000 m above sea level
STORAGE CONDITIONS -20°C...70°C, max. humidity 80% rH
UNIT m
AUTOMATIC SWITCH-OFF 30 sec laser / 3 min device
FUNCTIONS distances, areas, volumes, min/max/duration measurement
POWER SUPPLY Batteries 2 x 1,5V LR03 (AAA)
DIMENSIONS (W x H x D) 40 x 110 x 24 mm
WEIGHT (with batteries) 90 g

* Approx. 6 times brighter than a typical red laser with 630 - 660 nm

** See operating instructions for specific accuracies



*** At max. 5000 lux



LaserRange-Master Gi3

inclusive softbag
+ batteries 2 x 1,5V LR03 (AAA)

Packaging dimension (W x H x D)
110 x 235 x 60 mm

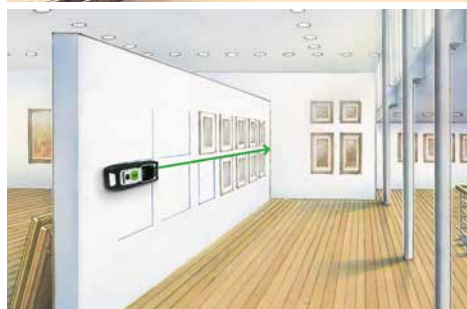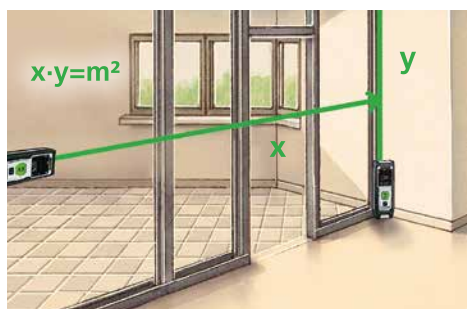

Illuminated VTN display



Small, compact design



Protective rubber casing

ARTICLE	ARTICLE NO	EAN-CODE	PU
LaserRange-Master Gi3	080.836A	4 021563 707249	5

