


CompactCube-Laser 3



Automatic cross-line laser
with lateral 90° laser
and slope function

Rev.1116


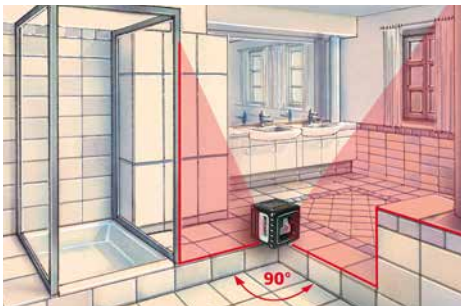


- **PowerBright-Laser:** Special high-performance laser diodes project extremely visible laser lines.
- This unit produces **3 very visible laser lines** which make it outstanding for the alignment of tiles, wall studding, windows, doors, etc.
- The **2 vertical lines** are aligned at right angles to one another.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- **Individually switchable** laser lines
- **Additional slope mode** to align angled surfaces.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **Transport lock:** A pendulum lock protects unit during transport.
- **Small, compact design** – fits in any toolbox
- Sturdy, ergonomically designed, **rubberised** casing

TECHNICAL DATA

SELF-LEVELLING RANGE ± 3°
ACCURACY ± 0,5 mm / m
LEVELLING automatic
OPERATING RANGE (depending on brightness of area) 15 m
LASER WAVELENGTH 635 nm
LASER CLASS 2 / < 1 mW
POWER SUPPLY 3 x 1.5 V alkaline batteries (type AAA, LR6)
OPERATING TIME with laser cross at front: approx. 20 hours with all laser lines: approx. 9 hours
WORKING TEMPERATURE 0°C ... +40°C
STORAGE TEMPERATURE -10°C ... +70°C
DIMENSIONS (W x H x D) 69 x 69 x 65 mm
WEIGHT (incl. batteries) 285 g

1H 2V



Automatic Level



Fits in any toolbox



1/4"-threads



CompactCube-Laser 3
+ batteries

Packaging dimension (W x H x D)
175 x 220 x 138 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
CompactCube-Laser 3	036.150A	4 021563 696710	2

